


Lined Spool Pipe

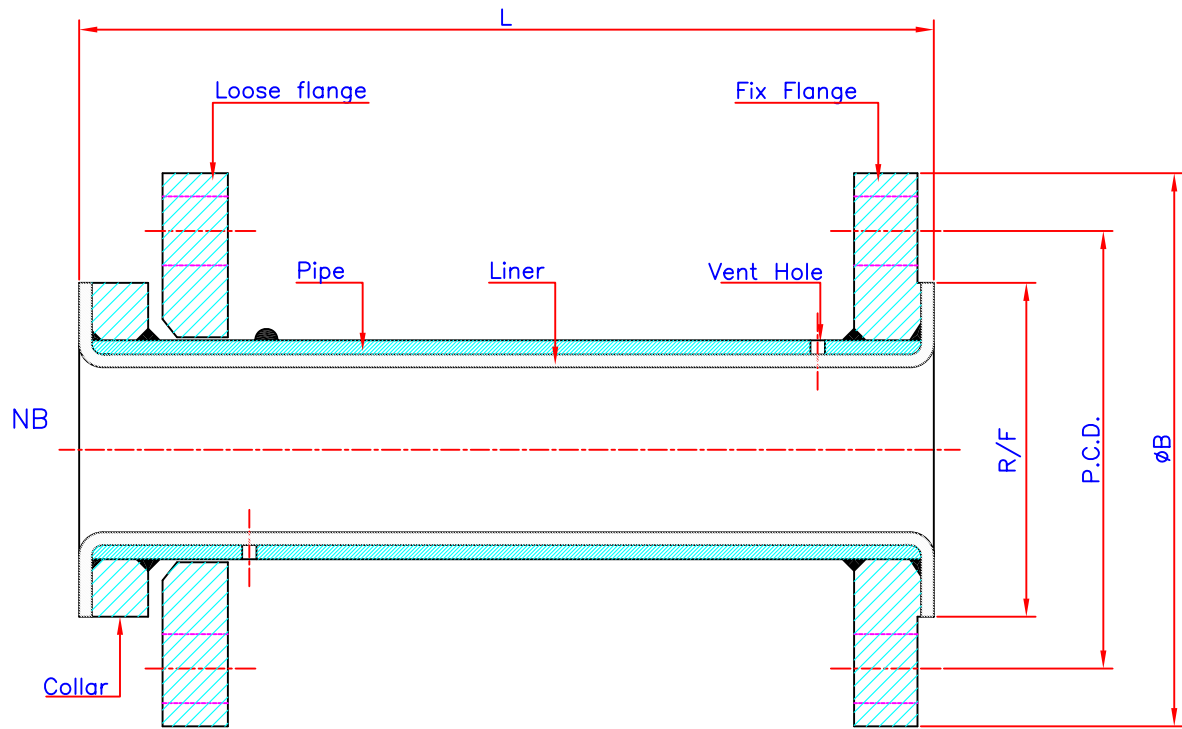

ASME B 16.5 - 150#

Size (NB)	Flange OD ϕB	Raised Face Diameter (R/F)	Flange P.C.D.	Length (L) maximum	PTFE Liner Thickness	Pipe Schedule
15	88.9	35	60.3	1000	--	40
20	98.4	43	69.8	1500	--	40
25	108.0	51	79.4	6000	3.5	40
40	127.0	73	98.4	6000	3.5	40
50	152.4	92	120.6	6000	3.5	40
65	177.8	105	139.7	6000	4.0	40
80	190.5	127	152.4	6000	4.0	40
100	228.6	157	190.5	6000	4.5	40
150	279.4	216	241.3	6000	5.0	40
200	342.9	270	298.4	3000	5.5	30
250	406.4	324	361.9	3000	6.5	30
300	482.6	381	431.8	1500	6.5	30
350	533.4	413	476.2	1500	7.0	20

ALL DIMENSION ARE IN mm

Item Material Data

Flange : IS : 2062 / A 105 / SS 304 / SS 316


Pipe : ASTM A 106 Gr B / SS 304 / SS 316
PIPE SCH- 40 / SCH -80

Liner : PTFE / PP /HDPE / ANTISTATIC (PTFE)

Flange Std.

- 1) ASME B 16.5-150# & 300#
- 2) DIN.STD.-PN6 / PN10 / PN 16 / PN 25
- 3) BS STD.-TABLE -D/E/F/H
- 4) JIS 5K / JIS 10K

Jacketed Lined Spool Pipe

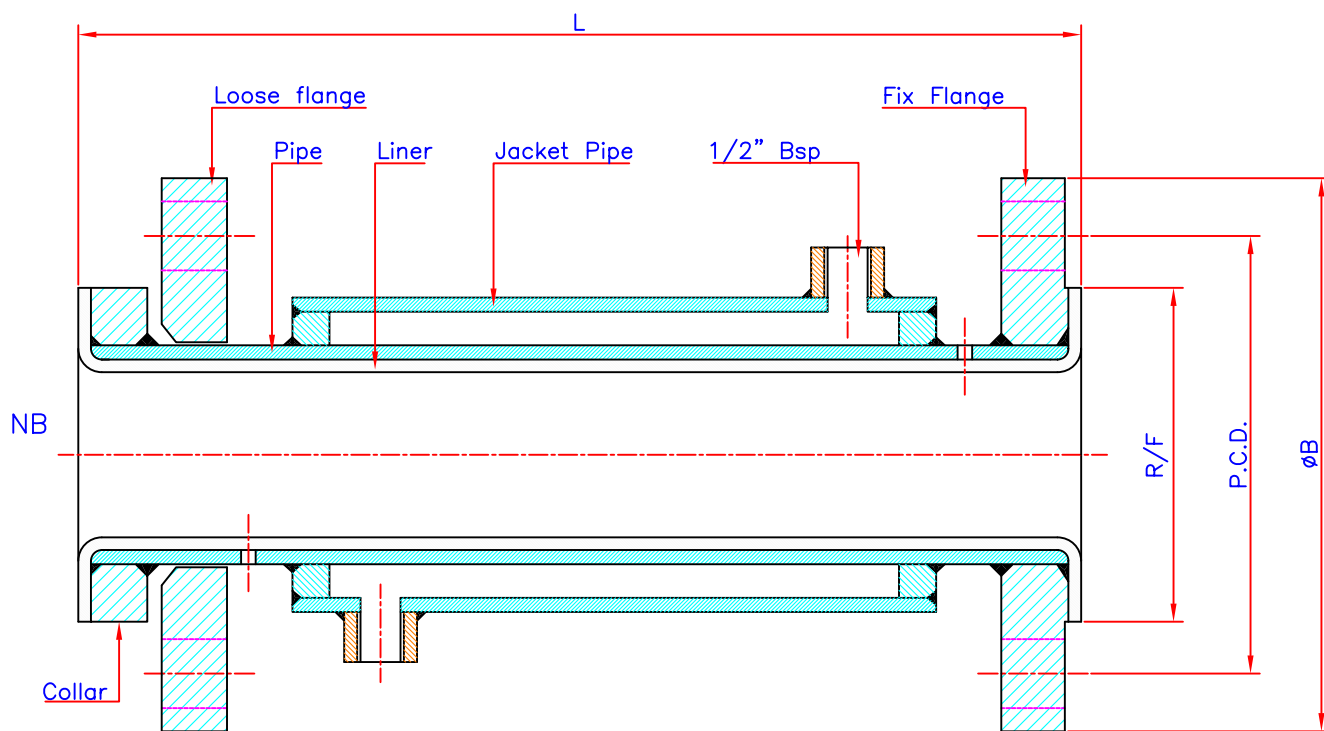

ASME B 16.5 - 150#

Size (NB)	Flange OD ϕB	JACKET PIPE NOMINAL BORE	Raised Face Diameter (R/F)	Flange P.C.D.	Length (L) maximum	PTFE Liner Thickness	Pipe Schedule
25	108.0	50	51	79.4	3000	3.5	40
40	127.0	65	73	98.4	3000	3.5	40
50	152.4	80	92	120.6	3000	3.5	40
80	190.5	100	127	152.4	3000	4.0	40
100	228.6	150	157	190.5	3000	4.5	40
150	279.4	200	216	241.3	3000	5.0	40

ALL DIMENSION ARE IN mm

Item Material Data

Flange : IS : 2062 / A 105 / SS 304 / SS 316
 Pipe : ASTM A 106 Gr B / SS 304 / SS 316
 PIPE SCH- 40 / SCH -80
 Jac.Pipe : ASTM A 106 Gr B / SS 304 / SS 316
 PIPE SCH-10 / SCH-40
 Liner : PTFE / PP /HDPE / ANTISTATIC (PTFE)

Flange Std.

- 1) ASME B 16.5-150# & 300#
- 2) DIN.STD.-PN6 / PN10 / PN 16 / PN 25
- 3) BS STD.-TABLE -D/E/F/H
- 4) JIS 5K / JIS 10K