


Lined Ball Check Valve

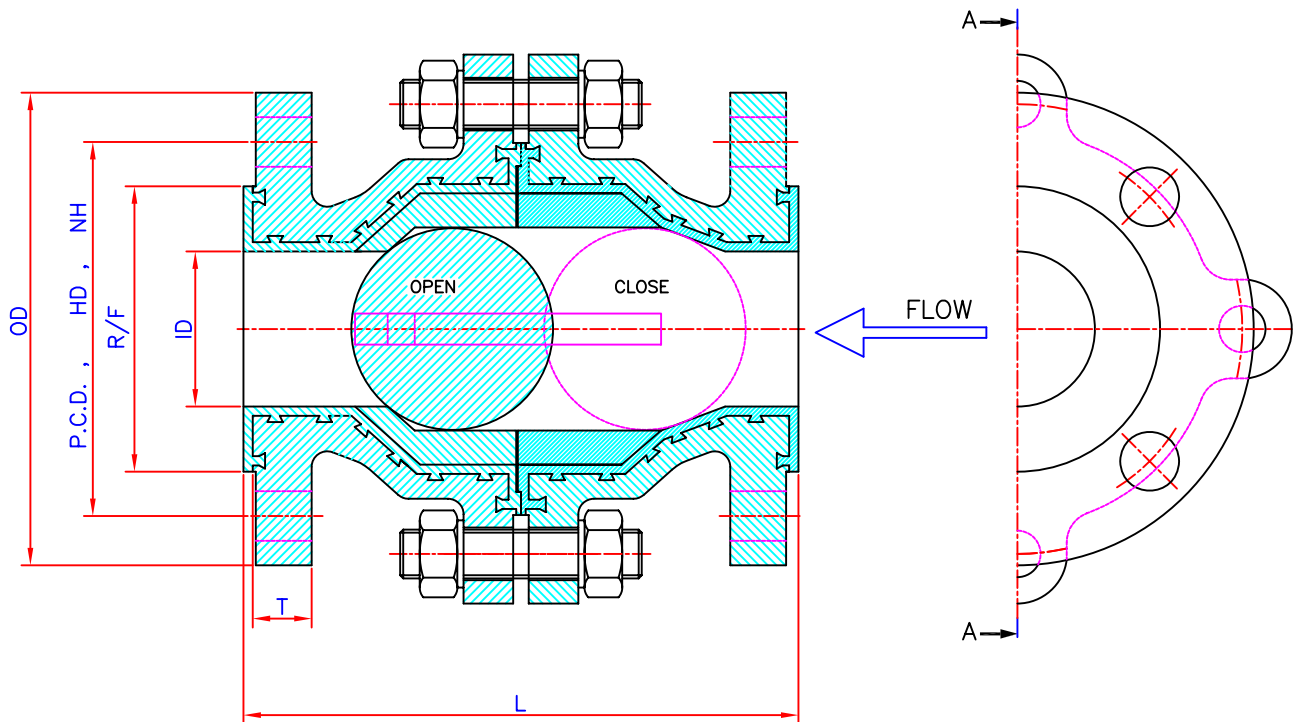

Valve Size mm	L	T	OD	ID	R/F	P.C.D	Holes Dia HD	No. of Hole NH	Lining Thickness
25	127	14.3	108.0	25.0	51.0	79.4	16.0	4	3.0
40	165	17.5	127.0	40.0	73.0	98.4	16.0	4	3.0
50	178	19.0	152.4	50.0	92.0	120.6	19.0	4	3.5
80	203	23.8	190.5	77.0	127.0	152.4	19.0	4	3.5

Item Material Data

Body : ASTM A 395 / A 216 WCB /SS 304/ SS 316


Ball : PTFE Solid Ball

Lining : PFA / FEP

Flange Std.

1) ASME B 16.5-150#

Lined Ball Valve

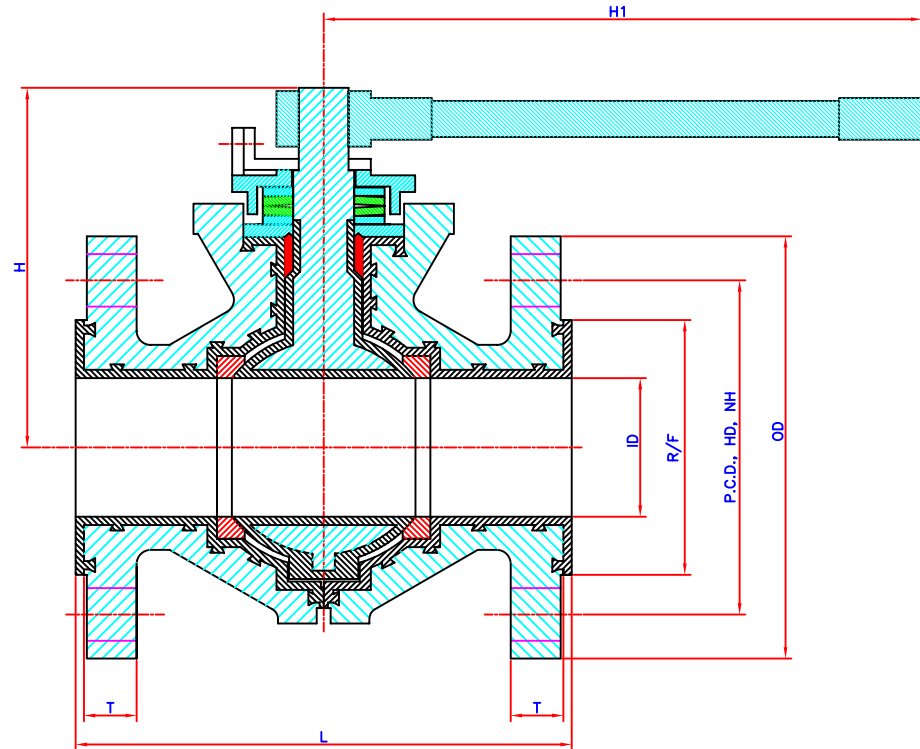

Valve Size mm	L	H	H1	T	OD	ID	R/F	P.C.D	Holes Dia HD	No. of Hole NH	Lining Thickness
15	108	105	205	11.5	88.9	12.5	35.0	60.3	16.0	4	3.0
25	127	100	205	12.6	108.0	25.0	51.0	79.4	16.0	4	3.0
40	165	125	230	16.0	127.0	40.5	73.0	98.4	16.0	4	3.0
50	178	130	315	17.5	152.4	50.0	92.0	120.6	19.0	4	3.5
65	190	150	315	20.7	177.8	64.0	105.0	139.7	19.0	4	3.5
80	203	170	355	22.2	190.5	77.0	127.0	152.4	19.0	4	3.5
100	229	230	465	23.2	228.6	100.0	157.0	190.5	19.0	8	4.5
150	267	300	500	24.0	279.4	148.0	215.0	241.3	22.2	8	5.0

Material Data

Body : ASTM A 395 / A216 WCB / SS 304/ SS 316


Ball : ASTM A 216 / CF 8

Lining : PFA / FEP

Flange Std.

1) ASME B 16.5-150#

Lined Plug Valve

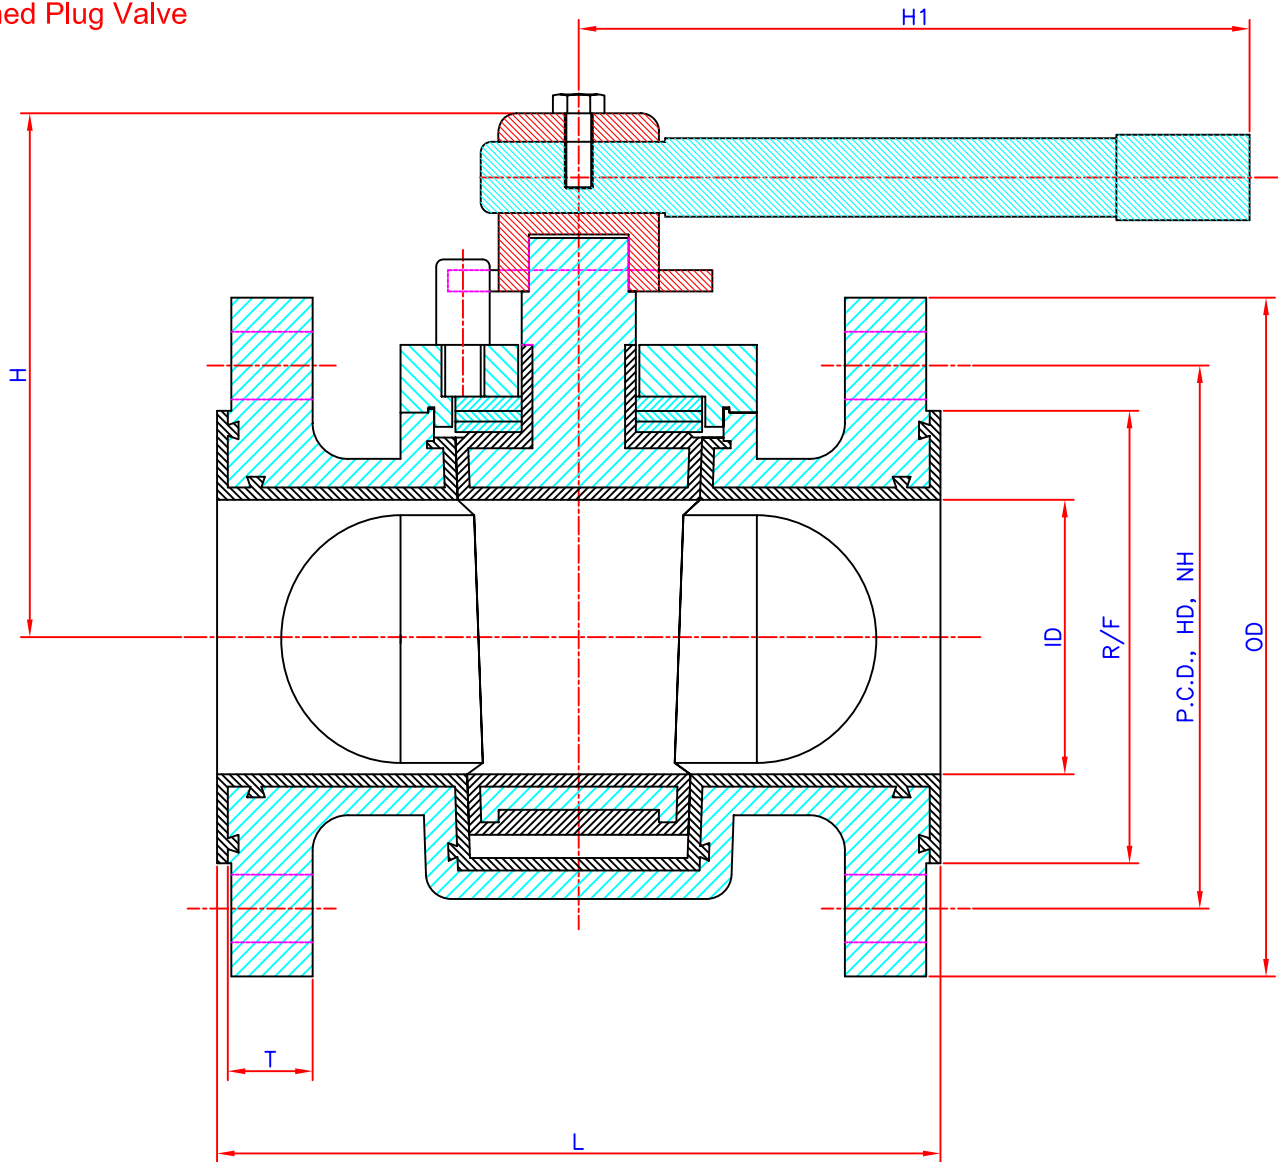

Valve Size mm	L	H	H1	T	OD	ID	R/F	P.C.D	Holes Dia HD	No. of Hole NH	Lining Thickness
25	127	100	205	14.3	108.0	25.0	51.0	79.4	16.0	4	3.0
40	165	120	230	17.5	127.0	40.0	73.0	98.4	16.0	4	3.0
50	178	120	315	19.0	152.4	50.0	92.0	120.6	19.0	4	3.5
80	203	150	355	23.8	190.5	77.0	127.0	152.4	19.0	4	3.5

Material Data

Body : ASTM A 395 / A216 WCB / SS 304/ SS 316

Plug : ASTM A 216 / CF 8

Lining : PFA / FEP

Flange Std.

1) ASME B 16.5-150#