





Continuously Lined Dip Pipe (CLDP)

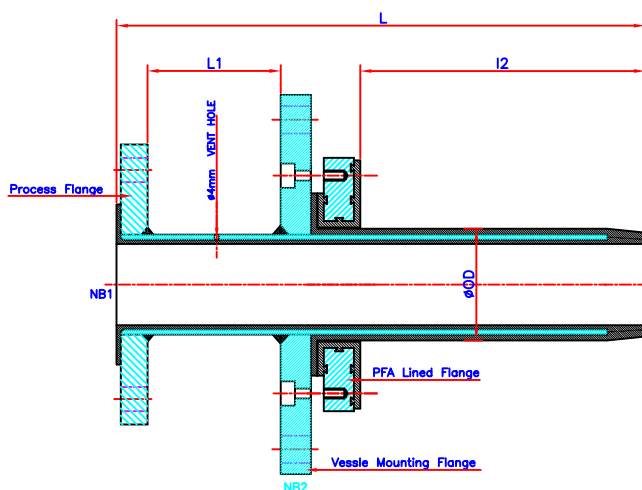

ASME B 16.5 - 150#

Process Flange (NB-1)	Vessel Mounting Flange (NB-2)		NB1			Outer Lining Thickness	Inner Lining Thickness	Dip Pipe With Lining OD	Min'm Inlet Nozzle ID	L1	L2	Total Lg. L
	Min.	Max.	Flange OD øB1	Raised Face Diameter (R/F1)	Flange P.C.D.1							
25	40	600	108.0	51	79.4	3.5	3.5	40.5	45			
40	50	600	127.0	73	98.4	3.5	3.5	55.0	60			
50	65	600	152.4	92	120.6	4.0	3.5	68.0	73			
65	80	600	177.8	105	139.7	4.0	4.0	81.0	86			
80	100	600	190.5	127	152.4	4.5	4.0	98.0	101			
100	150	600	228.6	157	190.5	5.0	4.5	124.5	130			
150	200	600	279.4	216	241.3	5.5	5.0	179.5	185			

ALL DIMENSION ARE IN mm

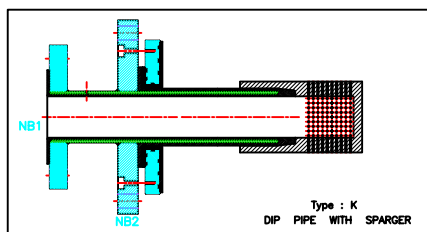

Note : Also Available Dip pipe

Item Material Data

Flange : IS : 2062 / A 105 / SS 304 / SS 316

Pipe : ASTM A 106 Gr B / SS 304 / SS 316
PIPE SCH- 40 / SCH -80

Lining : PTFE

Flange Std.

- 1) ASME B 16.5-150# & 300#
- 2) DIN.STD.-PN6 / PN10 / PN 16 / PN 25
- 3) BS STD.-TABLE -D/E/F/H
- 4) JIS 5K / JIS 10K

Note : In Casting Con.Reducer Flange Std.Applicable ASME B 16.5 -150#